

无刷直流减速电机

BLDC GEAR MOTOR

**40W
70mm**



● 电机型号/性能 List of motor characteristics

电机型号 Motor Model	电压 Voltage	功率 Power	空载电流 No load Current	空载转速 No load Speed	额定电流 Rated Current	额定转速 Rated Speed	额定扭矩 Rated Torque	有否 Hall(Y/N)	电机寿命 Life(Hours)
	V	W	A	RPM	A	RPM	N.m	/	H
F3B40-24GN-30S	24	40	0.7	3700	2.5	3000	0.13	Both	> 5000
F4B40-48GN-30S	48	40	0.4	3700	1.3	3000	0.13	Both	> 5000
F3B40-220GN-30S	220 (AC)	40	0.2	3700	0.5	3000	0.13	Both	> 5000

● 减速箱减速比/性能对照表 Gear reduction ratio/performance comparison---F3B40-24GN-30S

减速比 Gear Ratio	3	3.6	5	6	7.5	9	10	12.5	15	18	20	25	30	36	40	50	60	75	90	100	120	150	180	200
转速 r/min Speed	1000	833	600	500	400	333	300	240	200	167	150	120	100	83	75	60	50	40	33	30	25	20	17	15
容许转矩 N.m Torque	0.31	0.37	0.52	0.62	0.77	0.93	1.03	1.29	1.55	1.67	1.86	2.32	2.79	3.35	3.72	4.65	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0

● 表中转速是以电机的平均转速为基数除以减速比而算出的数值。实际转速将随负载大小而变化，变化范围 2-20%。

● 表中 ■ 色框表示输出轴的旋转方向与电机旋转方向相反。

● 表中转矩是以电机额定转矩 × 减速比 × 传动效率计算而得。

● In the table, the speed is calculated from the base of the motor's average speed divided by the deceleration ratio. The actual speed will vary with the load, ranging from 2% to 20%.


● The ■ box in the table indicates that the rotation direction of the output axis is opposite to that of the motor.

● Table transfer torque is calculated from motor rated torque * deceleration ratio * transmission efficiency.



● 尺寸图 DIMENSIONAL DRAWING

● 圆轴电机



重量 Weight: 0.64kg

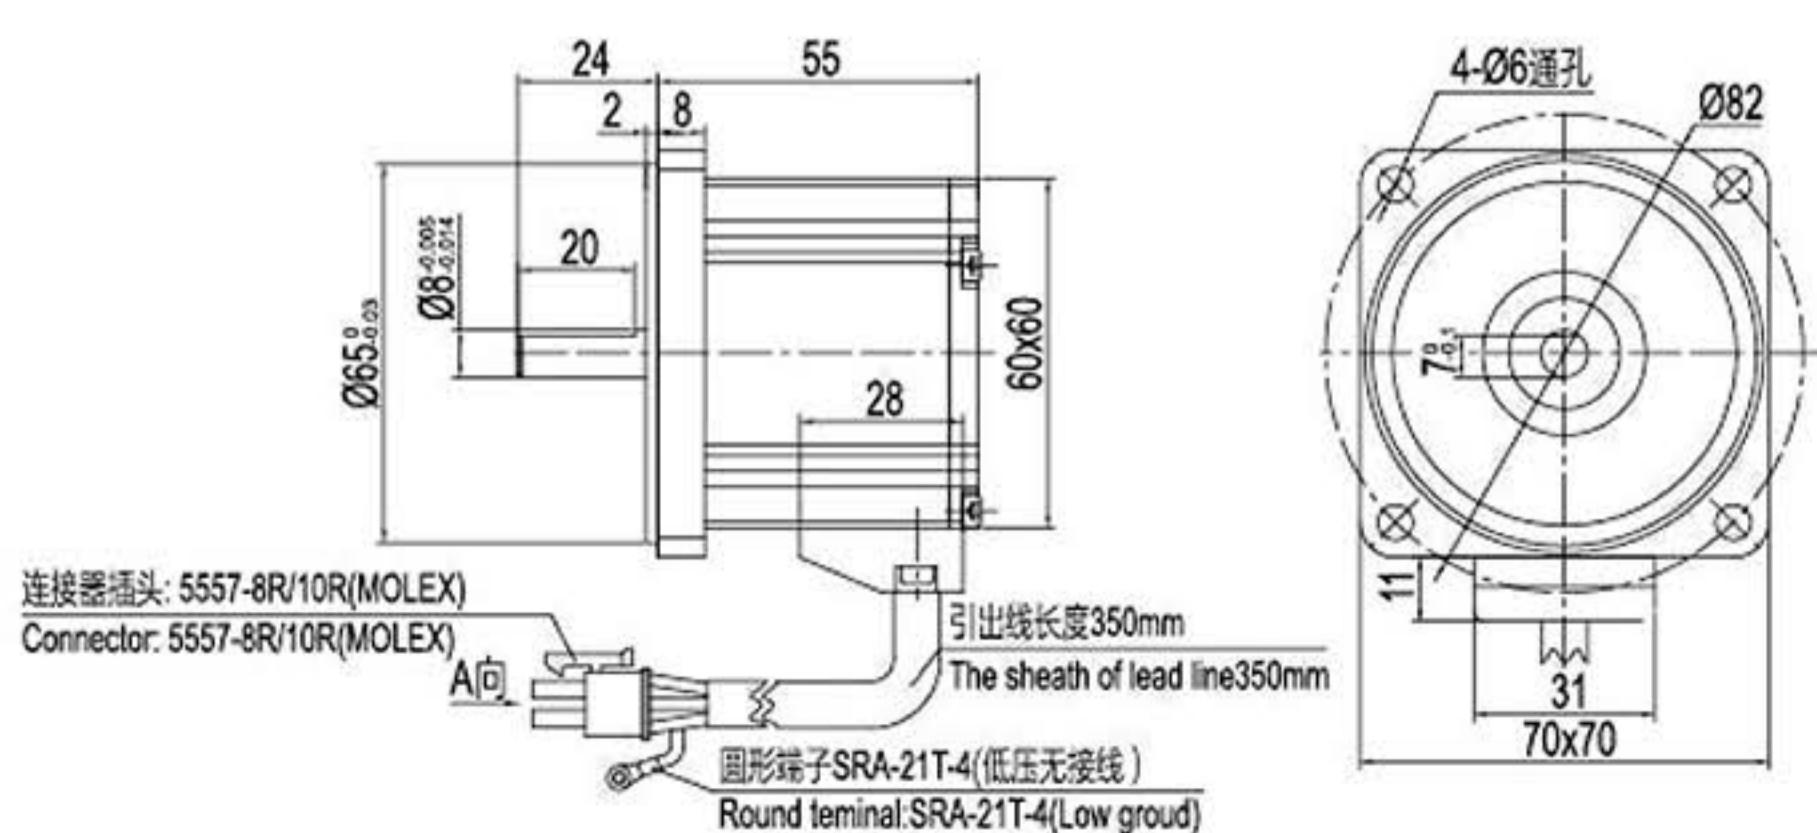

低压电机接线插孔对应信号说明
Low Voltage Wire Plughole Corresponding Signal Explanation

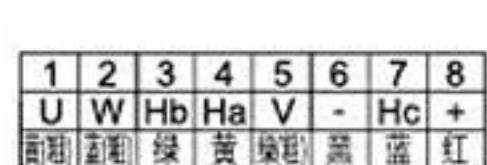


高压电机接线插孔对应信号说明
High Voltage Wire Plughole Corresponding Signal Explanation

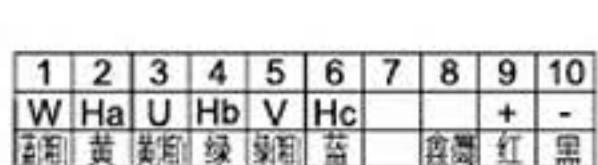

● 组合：电机 + 标准齿轮箱

重量 Weight: 1.2kg

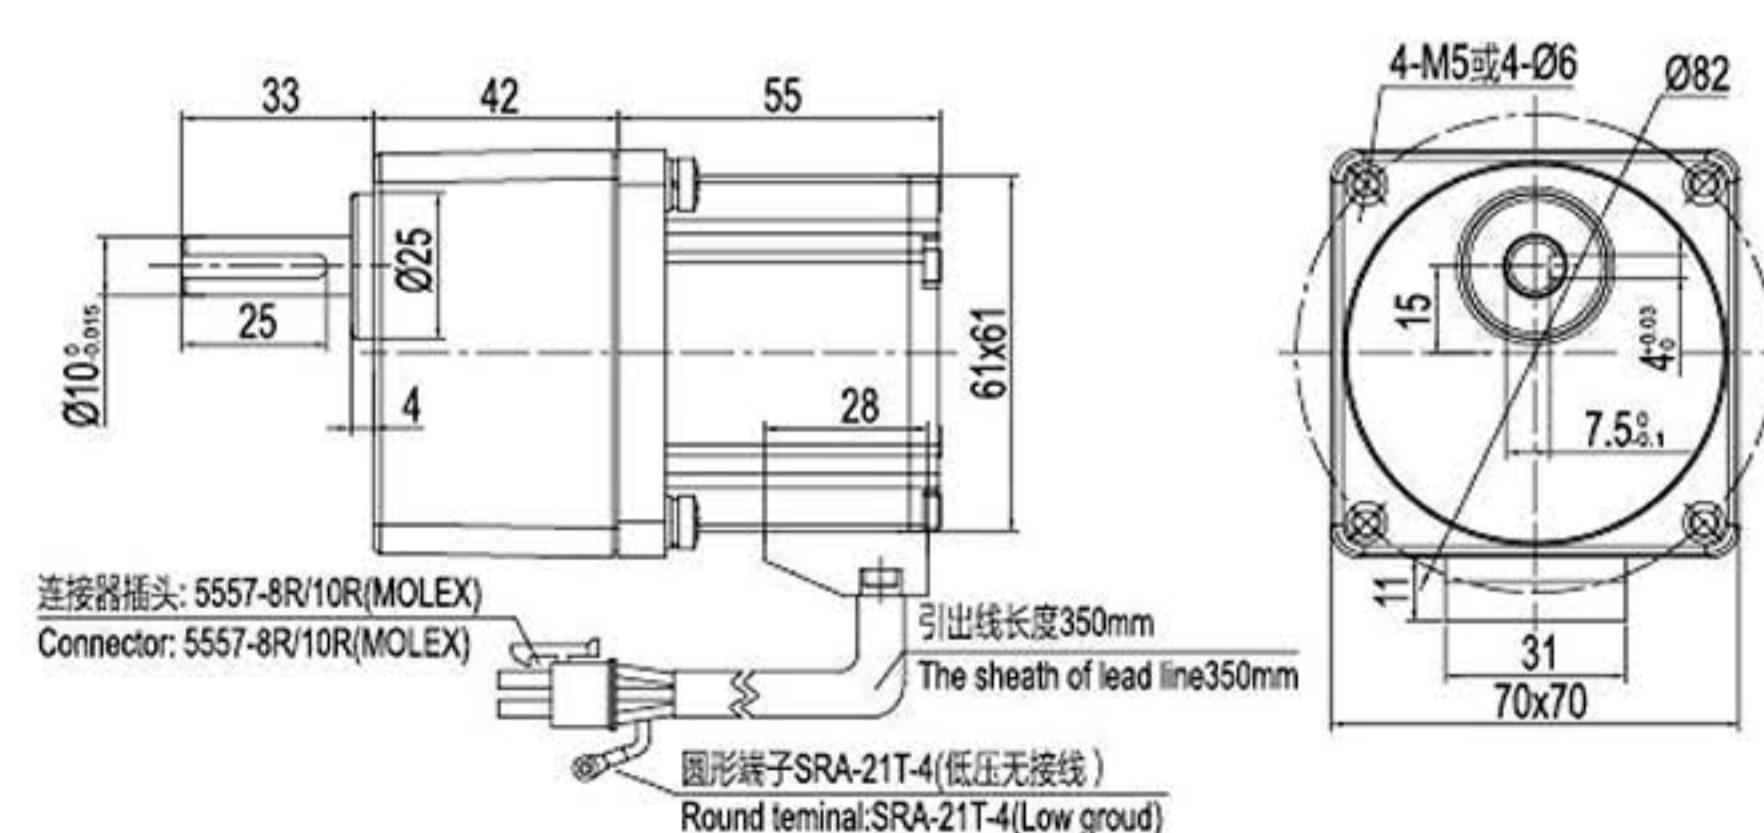

● 其中速比 3~15 可以做成短箱体，高度为 32mm

Gear ration 3~15 short case is possible, height of 32mm.

● 中间齿轮箱，高度 31mm。Decimal Gearhead, height of 31mm.

电动机外形与齿轮轴型相同，减速比 10。3GN10X