


REV.	REVISION RECORD	BY	DATE
0	ORIGIN	HW	6.12.2024

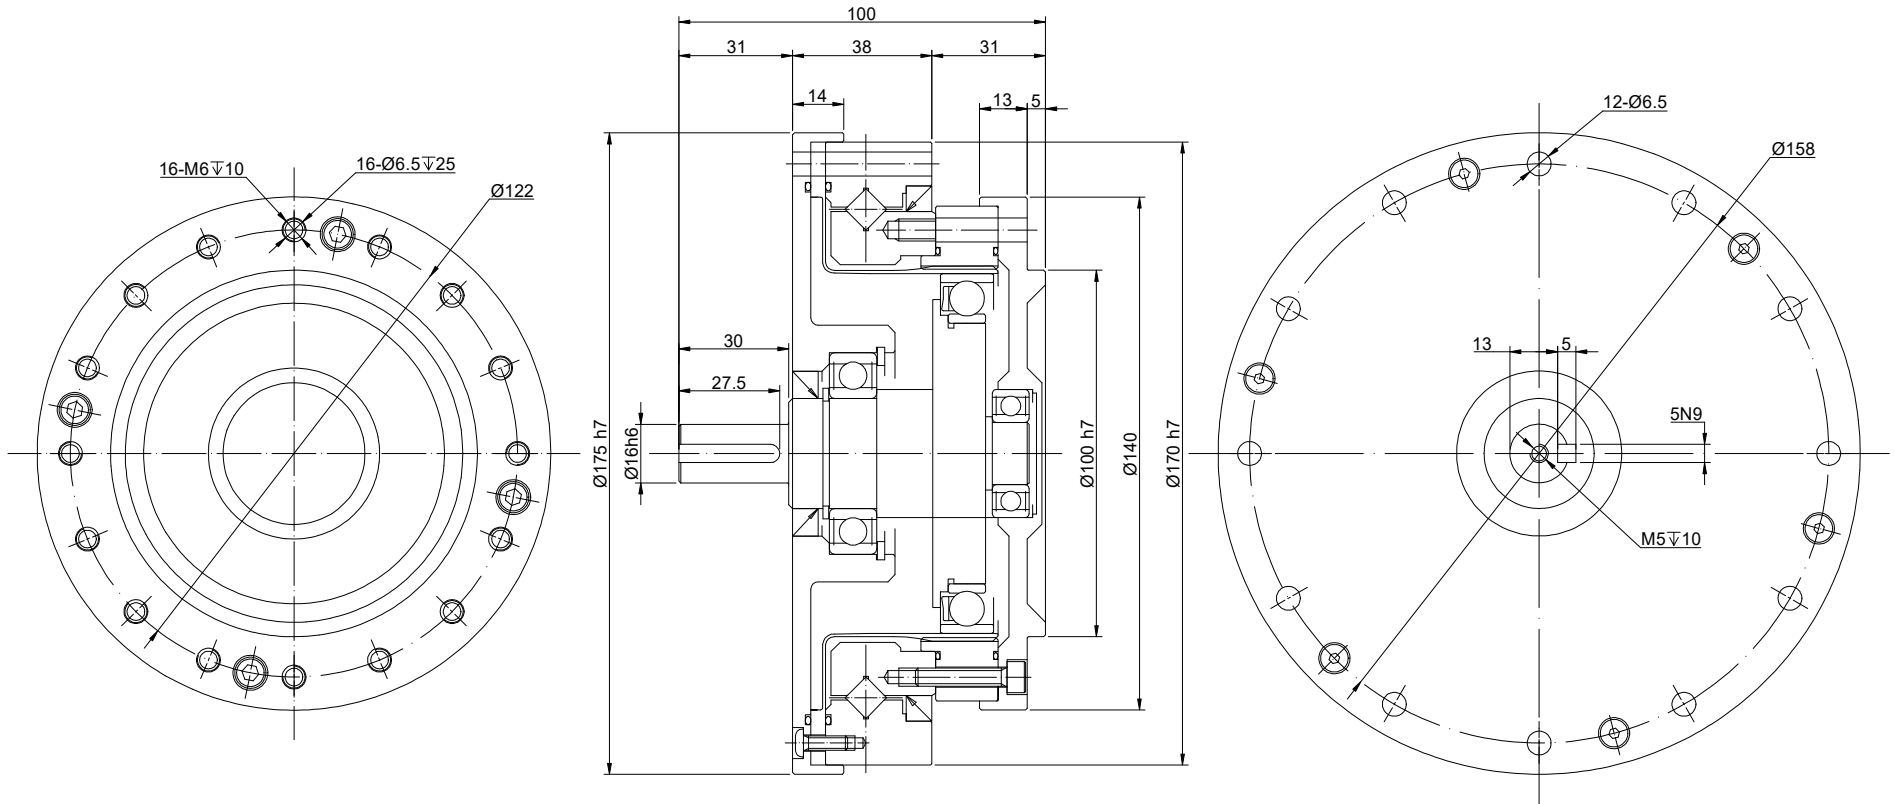

SPECIFICATION	CONNECTION	VALUE
GEAR RATIO		100
BACKLASH@NO-LOAD(arcsec)		<=20
RATED TORQUE(INPUT SPEED 2000RPM)(Nm)[lb-in]		265.00[2345.45]
MOMENT PERMISSIBLE TORQUE(Nm)[lb-in]		1080.00[9558.81]
PEAK START-STOP TORQUE(Nm)[lb-in]		568.00[5027.23]
MAXIMUM INPUT SPEED ALLOWED(RPM)		4000
AVERAGE INPUT SPEED ALLOWED(RPM)		3000
WEIGHT(kg)		7.00
LIFE(h)		15000
AMBIENT TEMPERATURE		0°C~40°C[32°F~104°F]

DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES AS BELOW:
DECIMALS ANGLES
X \pm 0.5 \pm 2°
X.X \pm 0.25
X.XX \pm 0.13

THIRD ANGLE
PROJECTION



SIGNATURE

DATE

DRN

HW

6.12.2024

APVD

LDJ

6.12.2024

STEPPERONLINE®

HARMONIC REDUCER

HHT-40-100-IV-D16

REV.	0	SCALE	1:2	DWG NO.	A3365
------	---	-------	-----	---------	-------