
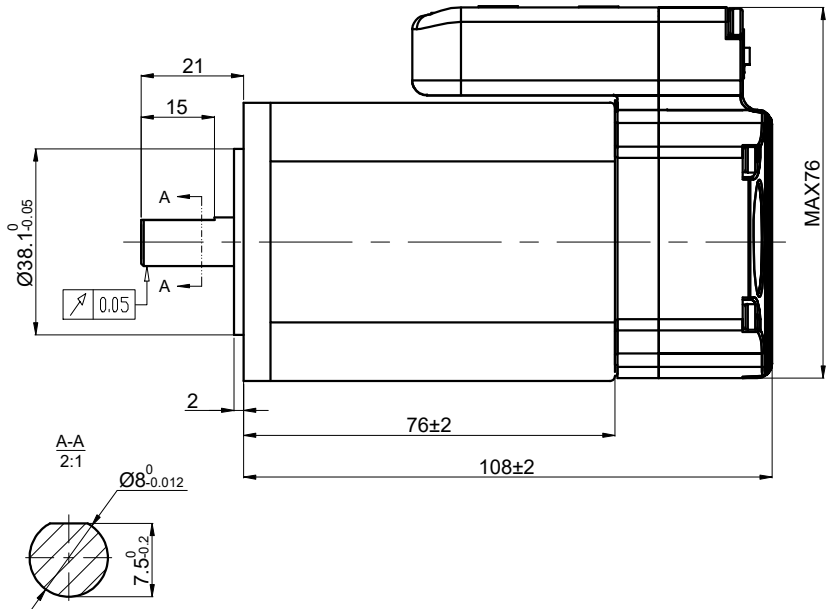


CUSTOMER'S MODEL: NO MODEL

REV.	REVISION RECORD	BY	DATE
0	ORIGIN	HW	6.27.2024

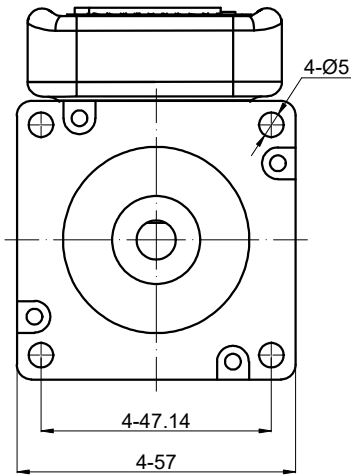

SPECIFICATION	VALUE
POWER (W)	90
RATED TORQUE (Nm)	0.3
PEAK TORQUE (Nm)	0.8
RATED SPEED (RPM)	3000±10%
PEAK SPEED (RPM)	4000±10%
RATED VOLTAGE (VDC)	36
INERTIA (kg.cm ²)	264
INPUT VOLTAGE (V)	20~50
RATED CURRENT(A)	3.6
CONTINUOUS CURRENT(Arms)	0.45
LOGIC SIGNAL CURRENT (mA)	10
ISOLATION RESISTANCE (MΩ)	100
PROTECTION LEVEL	IP54 FOR MOTOR/IP20 FOR DRIVE
WEIGHT (Kg) [lb]	0.95[2.09]

THIS DOCUMENT SHALL NOT BE REPRODUCED NOR SHALL THE INFORMATION CONTAINED HEREIN BE USED BY OR DISCLOSED TO OTHERS UNLESS EXPRESSLY AUTHORIZED IN BY WRITING STEPPERONLINE.

DIMENSIONS ARE IN MILLIMETERS.
TOLERANCES AS BELOW:
DECIMALS ANGLES
X ±0.5 ±2°
X.X ±0.25
X.XX ±0.13

STEPPERONLINE®

SERVO MOTOR

iSV57T-090S

THIRD ANGLE
PROJECTION



SIGNATURE		DATE
DRN	HW	6.27.2024
APVD	LDJ	6.28.2024