
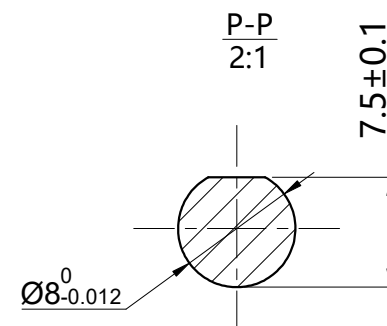
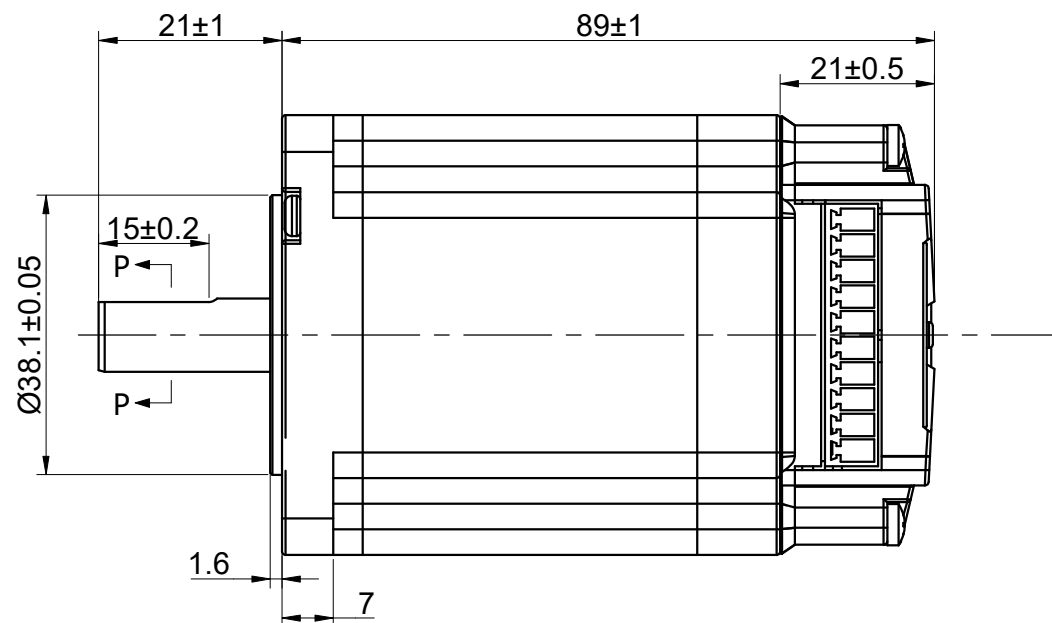


CUSTOMER'S MODEL: NO MODEL
END COVER COLOR: BLACK

REV.	REVISION RECORD	BY	DATE
0	ORIGIN	HW	7.4.2024

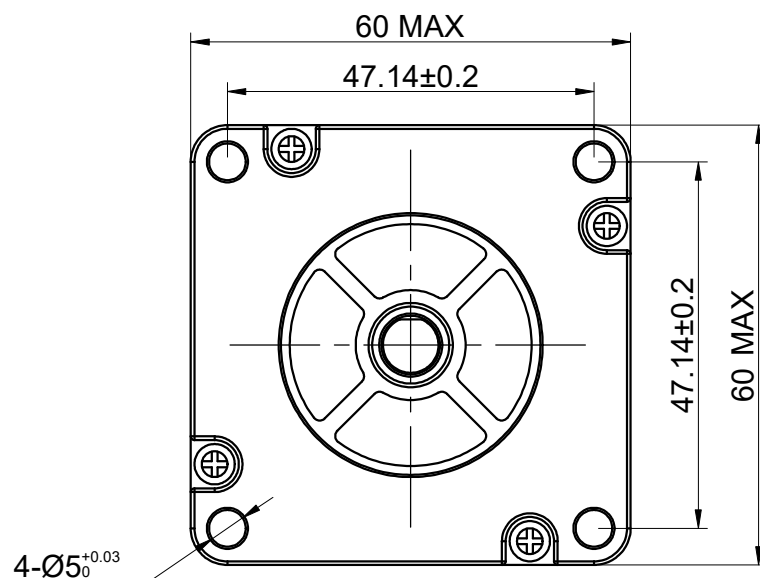

CONNECTION	BIPOLAR
SPECIFICATION	
POWER VOLTAGE(V)	20-50
PEAK CURRENT(A)	0.5-7.0
LOGICAL VOLTAGE(V)	5
LOGICAL CURRENT(mA)	7-16
HOLDING TORQUE(Nm)[lb-in]	2.10[18.59]
STEP ANGLE(°)	1.80
STEP ACCURACY(NON-ACCUM)	±5.00%
MAX. INPUT FREQUENCY	200KHZ
WEIGHT(Kg)[lb]	1.40[3.09]
AMBIENT TEMPERATURE	0°C~40°C[32°F~104°F]
INSULATION CLASS	B 130°C[266°F]
TEMPERATURE RISE	MAX.80°C

FULL STEP 2 PHASE-Ex.,WHEN FACING MOUNTING END (X)					DIMENSIONS ARE IN MILLIMETERS.	
STEP	A+	B+	A-	B-	TOLERANCES AS BELOW:	ANGLES
1	+	+	-	-	X ±0.5	±2°
2	-	+	+	-	X.X ±0.25	
3	-	-	+	+	X.XX ±0.13	
4	+	-	-	+		
CW					THIRD ANGLE PROJECTION	
SIGNATURE					DATE	
DRN					HW	
APVD					ZPJ	

STEPPERONLINE®						
INTEGRATED STEPPER MOTOR						
iCLD57-21						
REV.	0	SCALE	1:1	DWG NO.	A3468	