
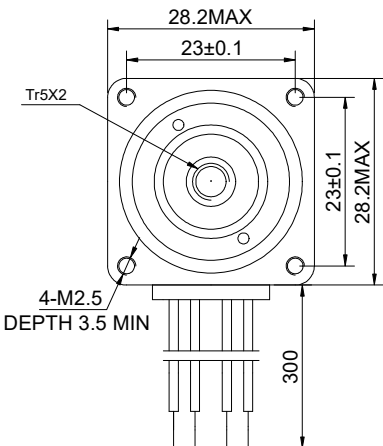
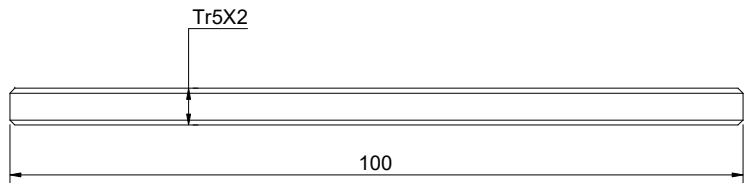


MODEL NO.	11N13S0754AA4-100RS	DWG NO.	A3771
-----------	---------------------	---------	-------

CUSTOMER'S MODEL: NO MODEL
END COVER COLOR: BLACK

REV.	REVISION RECORD	BY	DATE
0	ORIGIN	MYX	10.9.2024

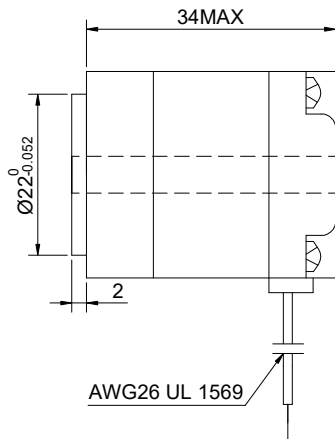

CONNECTION	BIPOLAR
AMPS/PHASE	0.75
RESISTANCE/PHASE(Ohms)@25°C	3.20±10%
INDUCTANCE/PHASE(mH)@1KHz	2.00±20%
HOLDING TORQUE(Nm)[lb-in]	0.06[0.53]
STEP ANGLE(°)	1.80
STEP ACCURACY(NON-ACCUM)	±5.00%
LEAD(mm)	2
LINEAR TRAVEL/STEP(mm)	0.01
AMBIENT TEMPERATURE	-20°C~50°C[4°F~122°F]
INSULATION CLASS	B 130°C[266°F]
TEMPERATURE RISE	MAX.80°C
AMBIENT HUMIDITY	MAX.85%

COMMENT:
1.TMBF 6000h OR MORE @ 24V/300RPM
2.INSULATION RESISTANCE
(NORMAL TEMPERATURE AND HUMIDITY): 100 Mohm
3.DIELECTRIC STRENGTH 500VAC FOR 1MIN.(BETWEEN THE MOTOR COILS
AND THE MOTOR CASE)

FULL STEP 2 PHASE-Ex.,WHEN FACING MOUNTING END (X)						DIMENSIONS ARE IN MILLIMETERS.	
STEP	A+	B+	A-	B-	CCW ↓ ↑ CW	DECIMALS	ANGLES
1	+	+	-	-		X ±0.5	±2°
2	-	+	+	-		X.X ±0.25	
3	-	-	+	+		X.XX ±0.13	
4	+	-	-	+		THIRD ANGLE PROJECTION	

THIS DOCUMENT SHALL NOT BE REPRODUCED
NOR SHALL THE INFORMATION CONTAINED
HEREIN BE USED BY OR DISCLOSED TO
OTHERS UNLESS EXPRESSLY AUTHORIZED IN
BY WRITING STEPPERONLINE.

SIGNATURE		DATE
DRN	MYX	10.9.2024
APVD	LDJ	10.9.2024

MOTOR CONNECTION			
PIN NO	BIPOLAR	LEADS	WINDING
1	A+	RED	
2	A -	BRN	
3	B+	YEL	
4	B -	ORG	

STEPPERONLINE®

STEPPER MOTOR

11N13S0754AA4-100RS

REV.	0	SCALE	1:1	DWG NO.	A3771
------	---	-------	-----	---------	-------