


MODEL NO.	57BYA74-24-01-PG27	DWG NO.	A3529
-----------	--------------------	---------	-------

CUSTOMER'S MODEL: NO MODEL  
END COVER COLOR: GRAY

REV.	REVISION RECORD	BY	DATE
0	ORIGIN	ZPJ	7.22.2024

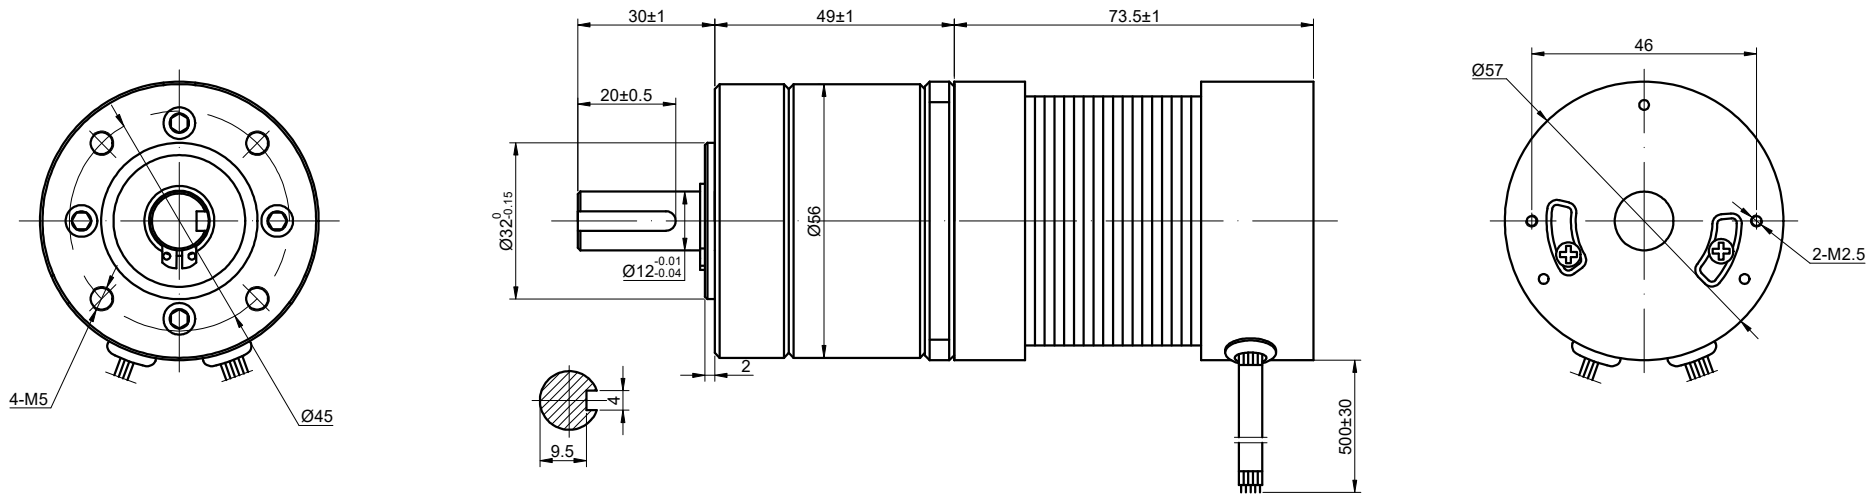


SPECIFICATION	VALUE
NO. of PHASES	3
NO. of POLES	4
RESISTANCE/PHASE(Ohms)@25°C	0.43±10%
INDUCTANCE/PHASE(mH)@1KHz	1.18±20%
RATED VOLTAGE(V)	24
RATED TORQUE w/o GEARBOX(N.m)	0.32
RATED POWER(W)	101
RATED CURRENT(A)	5.70
RATED SPEED w/o GEARBOX(RPM)	3000±10%
GEAR RATIO	26.8
EFFICIENCY	80.00%
BACKLASH@NO-LOAD	<=3°
BACK EMF(V/krpm)	4.80±5%
SENSOR	HALL
AMBIENT TEMPERATURE	-10°C~50°C[14°F~122°F]
INSULATION CLASS	B 130°C[266°F]
TEMPERATURE RISE	MAX.80°C

COMMENT:  
1.INSULATION RESISTANCE  
(NORMAL TEMPERATURE AND HUMIDITY): 50 Mohm  
2.DIELECTRIC STRENGTH: AC600V CUT OFF CURRENT 2mA FOR 1S

THIS DOCUMENT SHALL NOT BE REPRODUCED NOR SHALL THE INFORMATION CONTAINED HEREIN BE USED BY OR DISCLOSED TO OTHERS UNLESS EXPRESSLY AUTHORIZED IN BY WRITING STEPPERONLINE.

DIMENSIONS ARE IN MILLIMETERS.  
TOLERANCES AS BELOW:  
DECIMALS ANGLES  
X ±0.5 ±2°  
X.X ±0.25  
X.XX ±0.13

THIRD ANGLE PROJECTION

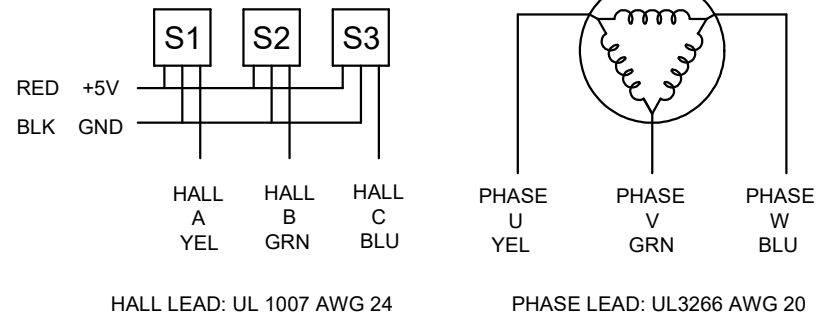

HALL LEAD: UL 1007 AWG 24

PHASE LEAD: UL3266 AWG 20

**STEPPERONLINE®**

**BRUSHLESS DC MOTOR**

**57BYA74-24-01-PG27**

SIGNATURE		DATE
DRN	ZPJ	7.22.2024
APVD	LDJ	7.22.2024

REV.	0	SCALE	1:1	DWG NO.	A3529
------	---	-------	-----	---------	-------